



AMCOTM
ENCLOSURES
an IMS Engineered Products Brand



Single Pivot Door

Standard Features

- Custom width for precise fit to most any opening
- Double acting spring with adjustable tension
- Sturdy aluminum frame
- Doors hold open at 85°
- Fire rated clear paneling
- Tight tolerances

Custom Options

- Solid bottom panel
- Cart bar
- Custom colors
- Aluminum handles
- Custom logo


*Custom
designed and
built specific
to the
constraints
of the
installation*

Contact Info

847-391-8100

1 Innovation Drive
Des Plaines, IL 60016

sales@amcoenclosures.com
www.amcoenclosures.com

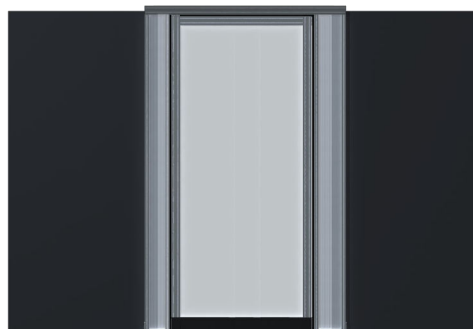

Technical Data

Single Pivot Door



Standard Specifications *

| Size and Finish | |
|---|---|
| Fits Aisle openings | 40" to 95 ⁵ / ₈ " |
| Total Height | Up to 98" |
| Pass Through Height | Up to 96 ⁷ / ₈ " |
| Total Width | Up to 96" |
| Pass Through Width | 29" |
| Profile Width | 1 ³ / ₁₆ " |
| Standard Finish | Satin Anodize (Clear) |
| Upgrade Finish | Custom Anodize and Powder Coat Colors |
| Door & Frame | |
| Material | 6560 T-6 Temper Aluminum |
| Tensile Strength | 30,000 psi |
| Paneling - Lexan (High Optic Polycarbonate) | |
| Material | Polycarbonate |
| Color | Clear |
| Odor | Odorless |
| Thickness | 4.5 mm |
| Self-ignition Temperature: | 650°F |
| Meets or exceeds ASTM E84 | |

* Custom sized doors available upon request

