



# Gap Hog™


## Gap Bloks™ & Gap Strippss™

Memory foam coated with fire retardant used for plugging leaks in a data center. Engineered product built to specific size as requested.



## Gap Fill Sheets™

Fire retardant foam designed to be cut on-site to custom fit and fill various sized gaps. Ordered by the sheet (54" x 60") and easily cut to size.

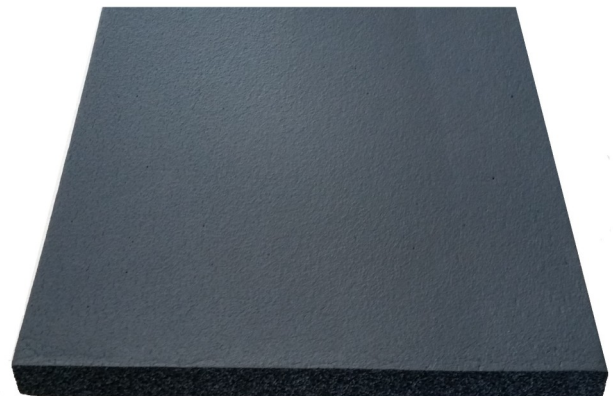

# Technical Data: Gap Hog

## Standard Specifications

| Gap Blokk and Stripp |                  |
|----------------------|------------------|
| Material             | Vinyl Based      |
| Temperature use      | 0° F to 200° F   |
| Flammability         | Listed UL 94 HBF |
| Block Resistance     | 4hr @ 160°F      |
| Chemical Resistance  | ASTM D1308       |
| RoHS Compliant       | Yes              |

| Gap Fill Sheets            |                                 |
|----------------------------|---------------------------------|
| Material                   | Polymer                         |
| Temperature use Range      | ASTM D 1056<br>-40° F to 200° F |
| Flammability               |                                 |
| FMVSS 302                  | UL 94                           |
| 25% Compression Resistance | ASTM D1056                      |
| UL 50 (Gaskets & Seals)    | UL Listed                       |

\* Standard sheet size 1" x 54" x 60". Sheet thickness can be ordered in increments of 1" (sheets can be laminated). Custom sized sheets can be requested.

### GapBlockks™



### GapStripp™



### GapFill Sheets™

