


# COLOCATION CAGES



IMS Engineered Products is

**ISO 9001 Certified**

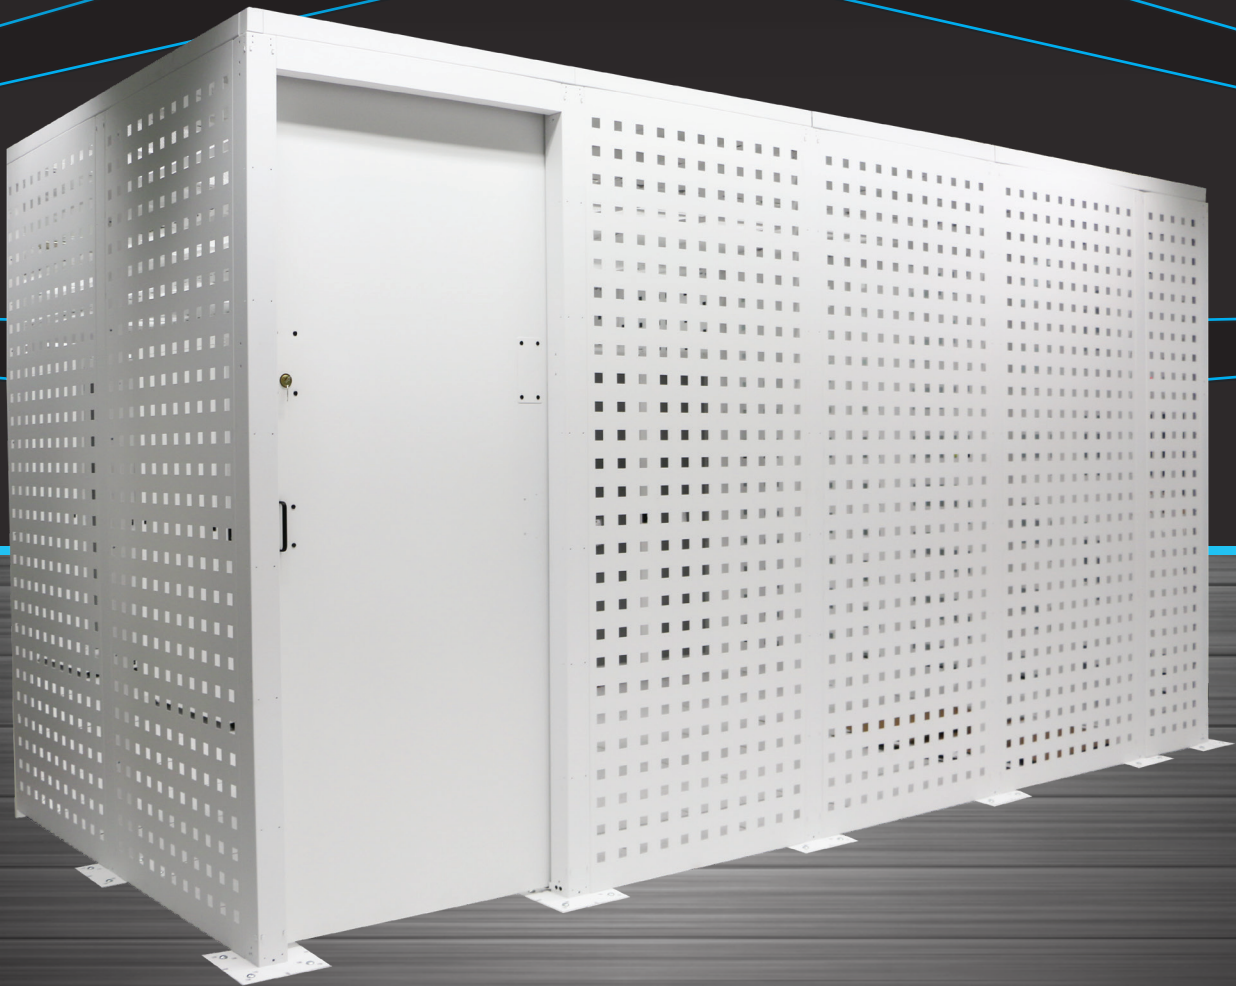

Designed and  
Manufactured in the USA

**Colocation Cages Catalog**





**AMCO**<sup>®</sup>  
**ENCLOSURES**  
an IMS Engineered Products Brand

# About Our Colocation Cages

**C**olocation cages provide a **security barrier** around your cabinets and IT infrastructure. They also provide privacy in rooms with multiple clients. AMCO offers a variety of panel and post sizes so that you can configure your cage to your exact requirements. Black and white standard cage parts are stocked and other colors are available upon request. These cage designs are flexible and the cage layouts can be easily rearranged as your requirements change.


Under-floor cages and ceiling panels are also available to add an extra layer of security where it is required. Sliding doors are offered as standard and are available in both manual close and auto close. Cage doors and panels are available in both solid and perforated.

\*Ceiling and under-floor cage custom and quoted upon request

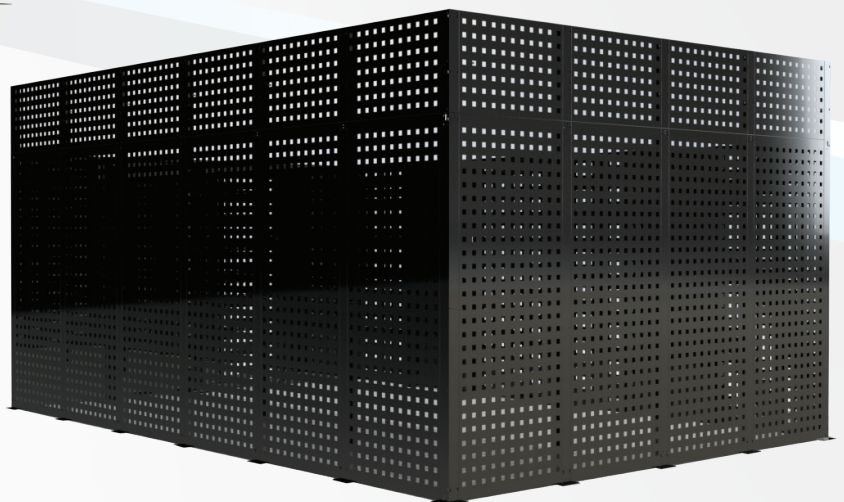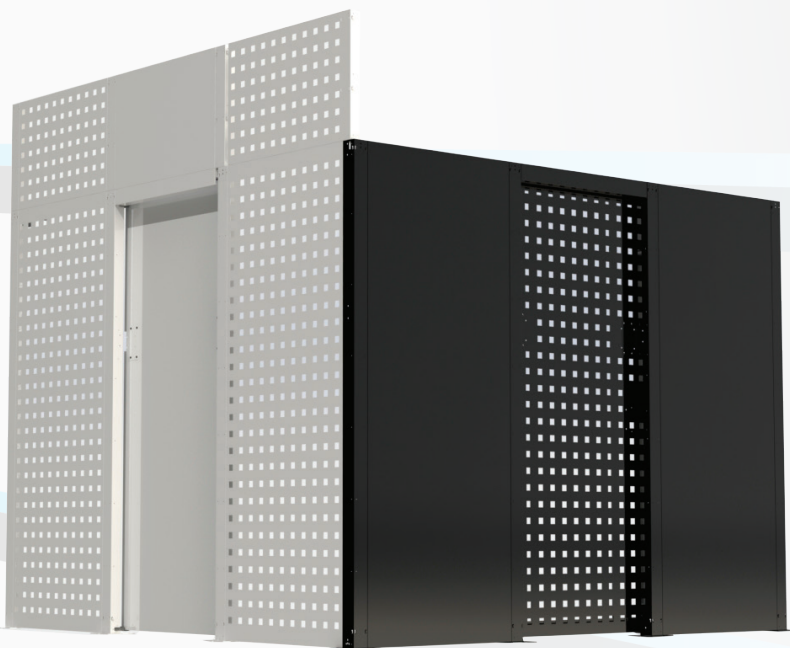




# Customize Your Cage

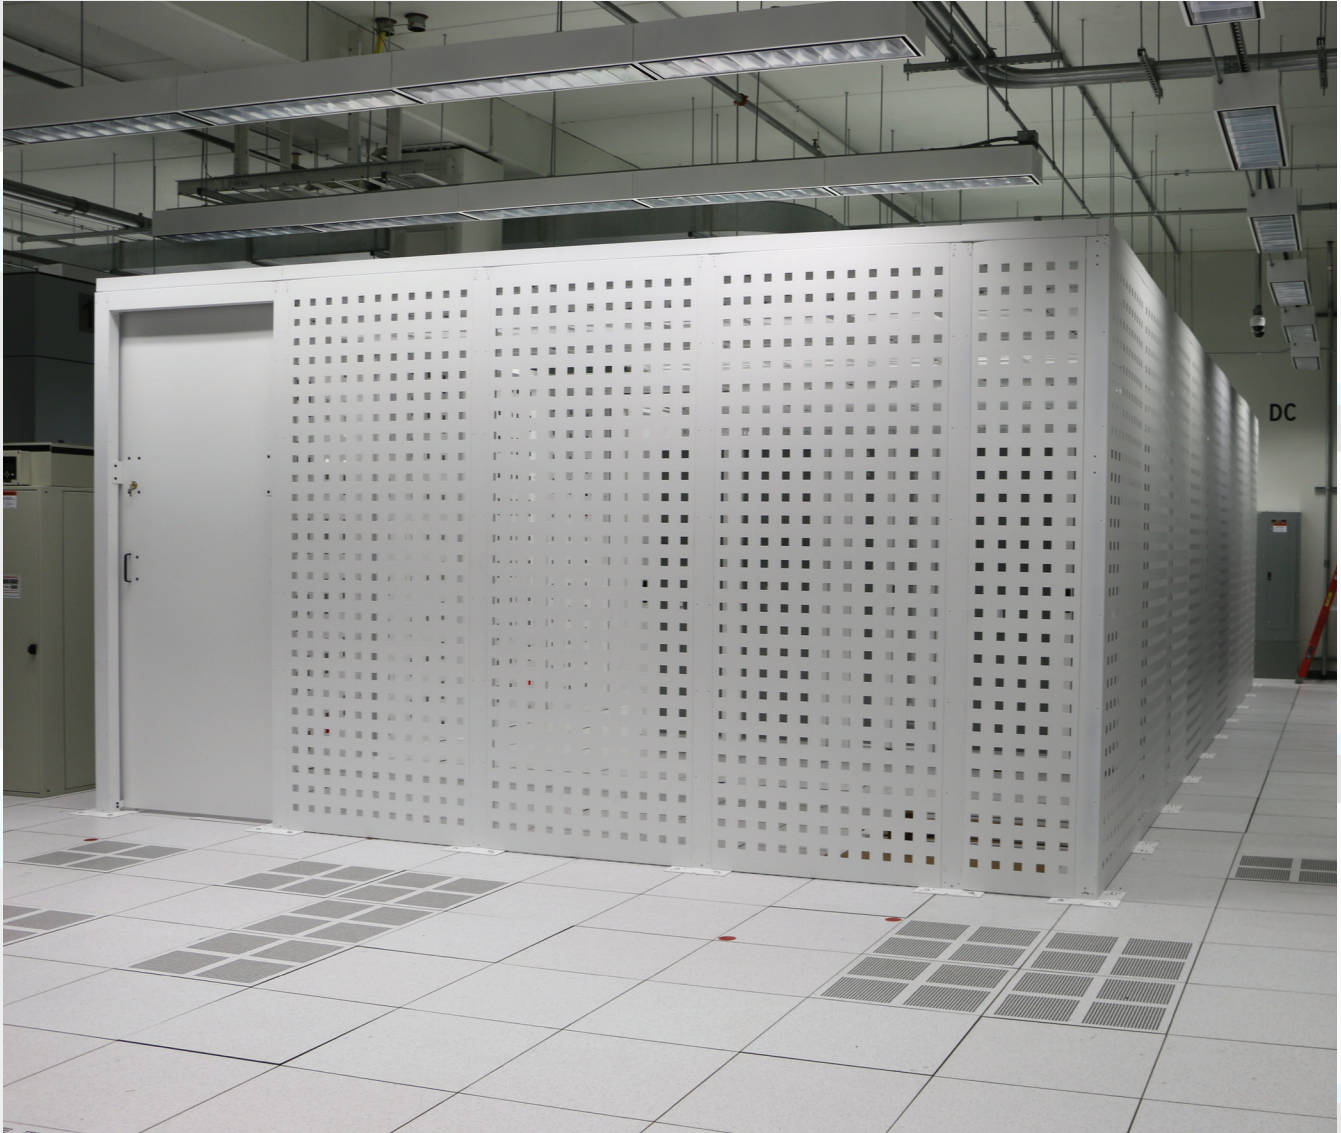

# Lower Wall Panels

Lower panels are made of aluminum and mount to the lower posts. These panels are available solid or perforated. The standard height for the lower panels is 9.5 feet.

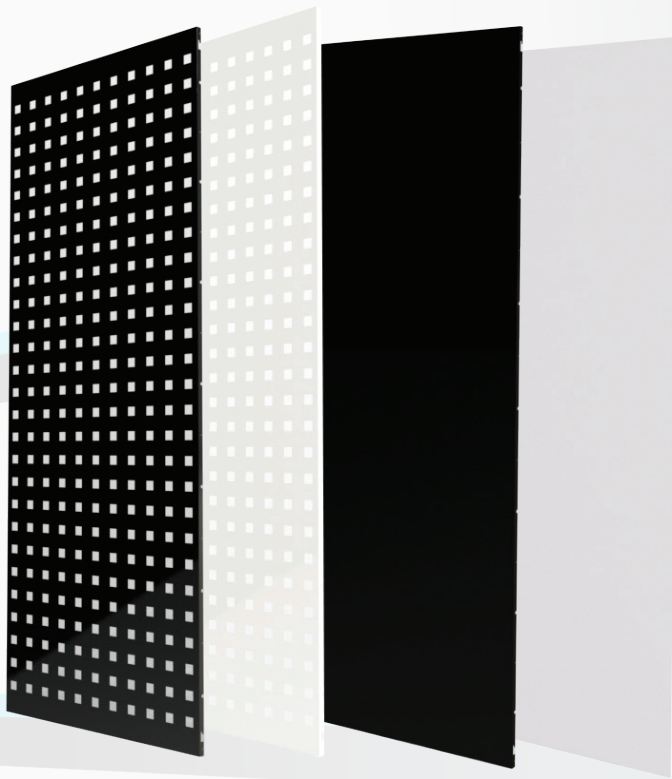

## Lower Wall Panel, Perforated

Panels material: 0.051" aluminum

Black Part Number	White Part Number
CLPL-P-114-48-B	CLPL-P-114-48-W


## Lower Wall Panel, Solid

Panels material: 0.051" aluminum


Black Part Number	White Part Number
CLPL-S-114-48-B	CLPL-S-114-48-W

Lower Wall Panel, Perforated

Lower Wall Panel, Solid

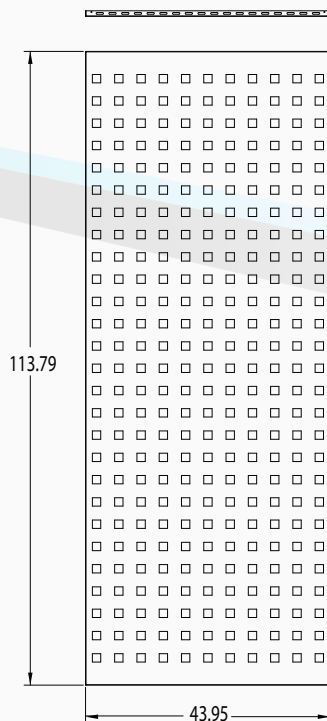

Lower Wall Panel, Perforated

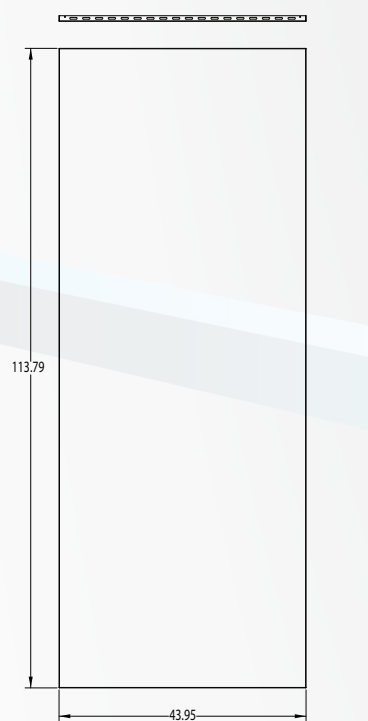


Lower Wall Panel, Solid



# Upper Panels

Upper panels are made of aluminum and mount to the upper posts. These panels are available solid or perforated. The standard heights for the upper panels are 2.5, 3.5, 4.5 and 5.5 feet.

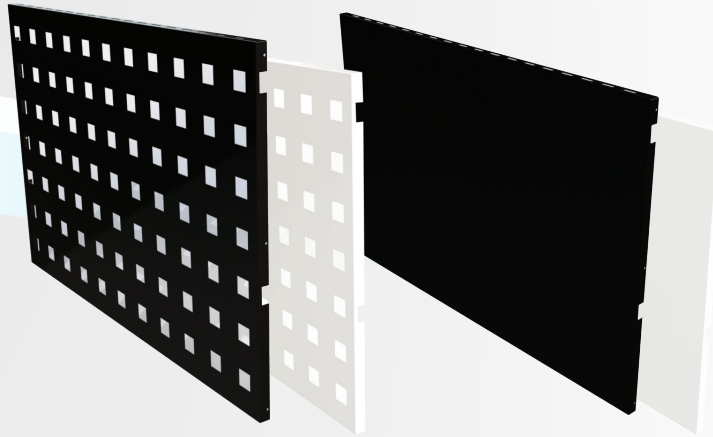

Upper Panel, Perforated

Upper Panel, Solid

## Upper Panel, Perforated

Panels material: 0.051" aluminum

Black Part Number	White Part Number	"A"	Length
CUPL-P-30-48-B	CUPL-P-30-48-W	29.95	30"
CUPL-P-42-48-B	CUPL-P-42-48-W	41.95	42"
CUPL-P-54-48-B	CUPL-P-54-48-W	53.95	54"
CUPL-P-66-48-B	CUPL-P-66-48-W	65.95	66"

## Upper Panel, Solid

Panels material: 0.051" aluminum

Black Part Number	White Part Number	"A"	Length
CUPL-S-30-48-B	CUPL-S-30-48-W	29.95	30"
CUPL-S-42-48-B	CUPL-S-42-48-W	41.95	42"
CUPL-S-54-48-B	CUPL-S-54-48-W	53.95	54"
CUPL-S-66-48-B	CUPL-S-66-48-W	65.95	66"

\*Top Portions not stocked



Upper Panel, Perforated



Upper Panel, Solid






# Lower Support Posts

Lower posts are made of steel and the standard height is 9.5 feet.

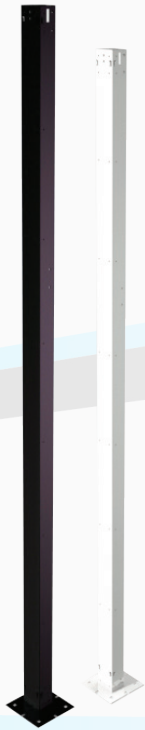

Lower Support Post

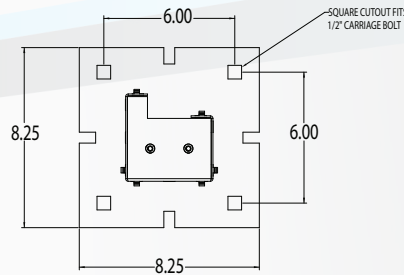

Base Plate

Post bottom plate: .194" steel

## Lower Support Post


Post material: .075" steel

Black Part Number	White Part Number
CLPT-114-B	CLPT-114-W


Lower Support Post

# Upper Posts

Upper posts are made of steel and come in standard heights of 2.5, 3.5, 4.5 and 5.5 feet.



Upper Post



Upper Post

## Upper Post

Post material: .075" steel

Black Part Number	White Part Number	"A"	Length
CUPT-30-B	CUPT-30-W	29.95	30"
CUPT-42-B	CUPT-42-W	41.95	42"
CUPT-54-B	CUPT-54-W	53.95	54"
CUPT-66-B	CUPT-66-W	65.95	66"



# Sliding Doors

Sliding doors are made of steel and can be mounted to open to the right or left. These doors are available solid or perforated and have the option of manual or auto-closing.



Solid Sliding Door

Perforated Sliding Door

Door material: 0.048" steel with hat channel reinforcements in the back

## Solid Sliding Door, Manual-Closing

Door material: 0.048" steel

Black Part Number	White Part Number
CSD-S-M-114-48-B	CSD-S-M-114-48-W

## Solid Sliding Door, Auto-Closing

Door material: 0.048" steel

Black Part Number	White Part Number
CSD-S-A-114-48-B	CSD-S-A-114-48-W

## Perforated Sliding Door, Manual-Closing

Door material: 0.048" steel


Black Part Number	White Part Number
CSD-P-M-114-48-B	CSD-P-M-114-48-W

## Perforated Sliding Door, Auto-Closing


Door material: 0.048" steel

Black Part Number	White Part Number
CSD-P-A-114-48-B	CSD-P-A-114-48-W

**\*Retrofit Kit to Convert a Manual Door to an Auto-Closing Door - Part Number CSD-AC-KIT**

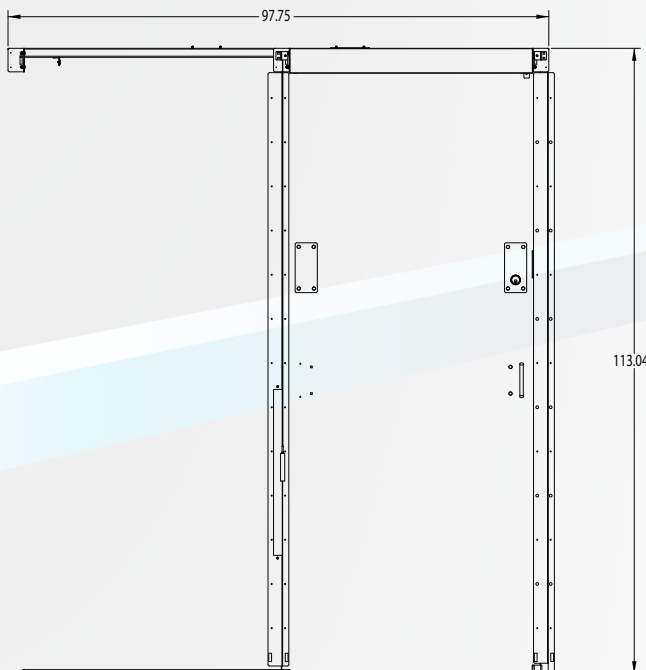

Solid Sliding Door

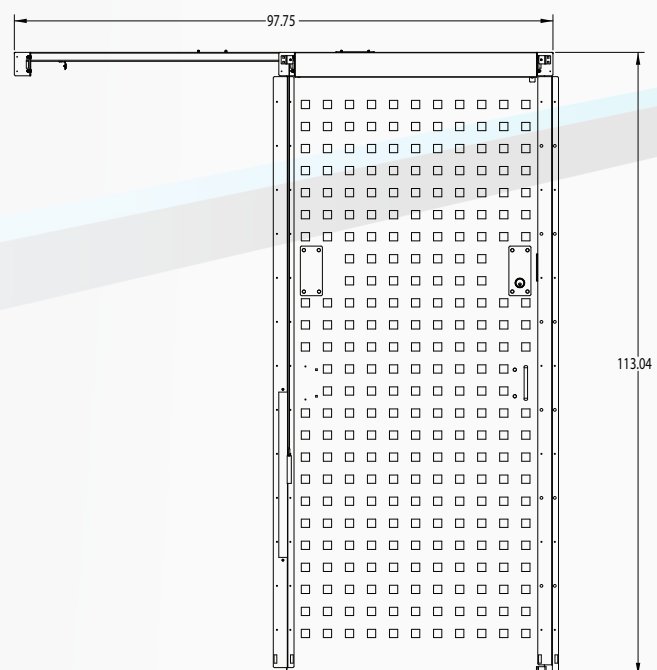

Perforated Sliding Door



## Warranty & Policies

### A. Choice of Method of Shipment

Unless otherwise specified, AMCO Enclosures are shipped as individual modules per ISTA packaging certification with single width components assembled on the frame. Upon request, console arrangements will be completely assembled at the factory and shipped like furniture, via van, at no additional charge for assembly. Console arrangements may also be crated for shipment. Crating charges will be quoted for each such order, as console arrangements vary.

### B. Design Changes

To allow continued progress, improvement, and adaptability in an advancing industry, AMCO Enclosures reserves the right to make product changes as deemed necessary.

### C. Price Discounts

Purchase orders cannot be combined for discount advantages.

### D. Proprietary Rights

The catalog and drawings contain information deemed proprietary to AMCO Enclosures and are to be used only for the purposes for which they are submitted and, further, shall not be copied in whole or in part without the prior written consent of AMCO Enclosures.

### E. Cancellation & Return

Cancellation and return charges begin at 40% with a minimum of \$50.00, depending on the nature of the order and the extent to which it has been processed. All returns have a 30-day, upon receipt, time limit. Returns must be freight prepaid and not made without the prior written approval of AMCO Enclosures.

### F. Terms

All quotations, order confirmations, published prices, and discounts based on delivery F.O.B. AMCO Enclosures, 1 Innovation Drive, Des Plaines, IL freight collect. Invoice payment terms-net 30 days.

### G. Sales Representation

Experienced factory sales representatives in all principle cities of the U.S.A., Canada and Mexico. Ask for sales representative listing. AMCO Enclosures equipment is thoroughly inspected prior to shipment. No returns of damaged equipment will be accepted without prior written approval of AMCO Enclosures.

IMS Engineered Products is

**ISO9001 Certified**



Designed and  
Manufactured in the USA

### Limited Warranty

AMCO Enclosures will repair or replace enclosures, accessories, and components manufactured by AMCO Enclosures that are proven to be defective in material or factory workmanship under normal use during the Period of this Warranty.

### Warranty Period

Ten years from date of purchase. (Non-transferable)

### This warranty does not cover:

- Failure in whole or part resulting from misuse, alteration, excessive temperature, excessive humidity, corrosive environment, or lack of maintenance.
- Any materials or components used or manufactured pursuant to the purchaser's specifications.
- Items ordered in error or not required.

### Power/Accessories

Warranty as specified by manufacturer.

### Warranty Repair


Purchaser shall obtain controlled authorization number before returning any items alleged to be defective to AMCO Enclosures.

### Inspection

AMCO Enclosures shall have the right to inspect any and all allegedly defective items on-site at purchaser's convenience.

### Disclaimer of Consequential Damages and Limitations of Implied Warranty

AMCO Enclosures disclaims any responsibility for loss of time or use of parts or equipment wherein AMCO Enclosures, components, or accessories are used, transportation or any other incidental or consequential damage; and any implied Warranties including the implied Warranty of merchantability and fitness for intended use are limited to the duration of this written warranty.



**AMCO**<sup>®</sup>  
**ENCLOSURES**  
an IMS Engineered Products Brand

1 Innovation Drive  
Des Plaines, IL 60016  
[www.amcoenclosures.com](http://www.amcoenclosures.com)  
847-391-8100