


Titan EP Technical - Frame

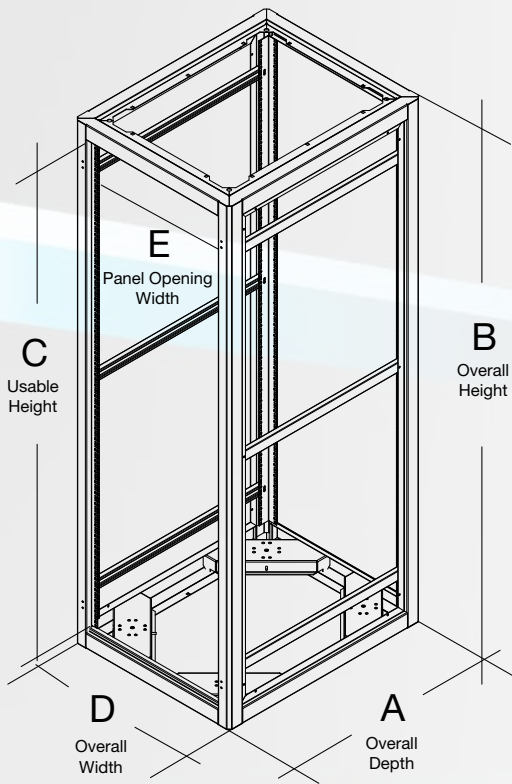

Titan EP Frame Construction

- Four separate 14 GA. main channels provide a rugged frame assembly.
- Uni-strut horizontal channels are welded to vertical rails providing full depth equipment adjustments.
- 12 GA Caster brackets are welded into the corners of each frame. Each bracket includes a weld stud for grounding.

Add to overall height

- Heavy duty casters- 1.75"
- Light duty casters- 1"
- Leg levelers- .625"

Certifications & Testing

- EIA 310D Equipment Mounting
- Mil Std. 810E Vibration
- Mil Std. 901D Shock
- Certified Load Rating
Static: 5,400 lbs.
Dynamic: 3,300 lbs.

24" Width Frame (Material: 14 GA. CRS, Uni-strut: 14 GA. CRS)

RU Height	25.5" Depth (A)	30" Depth (A)	36" Depth (A)	Overall Height (B)	Usable Height (C)	Overall Width (D)	Panel Opening Width (E)
45	R-TN-45U24-255	R-TN-45U24-30	R-TN-45U24-36	85.12"	78.75"	24"	19.75"
40	R-TN-40U24-255	R-TN-40U24-30	R-TN-40U24-36	76.38"	70"	24"	19.75"
35	R-TN-35U24-255	R-TN-35U24-30	R-TN-35U24-36	67.63"	61.25"	24"	19.75"

Sizes Below Available - Contact AMCO Direct for Pricing & Lead Times

30	R-TN-30U24-255	R-TN-30U24-30	R-TN-30U24-36	58.88"	52.5"	24"	19.75"
24	R-TN-24U24-255	R-TN-24U24-30	R-TN-24U24-36	48.38"	42"	24"	19.75"
18	R-TN-18U24-255	R-TN-18U24-30	R-TN-18U24-36	37.88"	31.5"	24"	19.75"
12	R-TN-12U24-255	R-TN-12U24-30	R-TN-12U24-36	27.38"	21"	24"	19.75"

29" Width Frame (Material: 14 GA. CRS, Uni-strut: 14 GA. CRS)

RU Height	25.5" Depth (A)	30" Depth (A)	36" Depth (A)	Overall Height (B)	Usable Height (C)	Overall Width (D)	Panel Opening Width (E)
45	R-TN-45U29-255	R-TN-45U29-30	R-TN-45U24-36	85.12"	78.75"	29"	24.75"
40	R-TN-40U29-255	R-TN-40U29-30	R-TN-40U24-36	76.38"	70"	29"	24.75"
35	R-TN-35U29-255	R-TN-35U29-30	R-TN-35U24-36	67.63"	61.25"	29"	24.75"

Sizes Below Available - Contact AMCO Direct for Pricing & Lead Times

30	R-TN-30U29-255	R-TN-30U29-30	R-TN-30U24-36	58.88"	52.5"	29"	24.75"
24	R-TN-24U29-255	R-TN-24U29-30	R-TN-24U24-36	48.38"	42"	29"	24.75"
18	R-TN-18U29-255	R-TN-18U29-30	R-TN-18U24-36	37.88"	31.5"	29"	24.75"
12	R-TN-12U29-255	R-TN-12U29-30	R-TN-12U24-36	27.38"	21"	29"	24.75"