




## Auto Closing Single Sliding Door

### Standard Features

- Ordered to size for precise fit
- Smooth operation under high air pressure
- No threshold design
- Soft close auto closing door
- Sturdy aluminum frame
- Hold-Open feature

### Door Options

- Clear/Black Anodize
- Aluminum Handle
- Digital/key Lock
- Free Standing
- Custom Colors
- Other Customizations

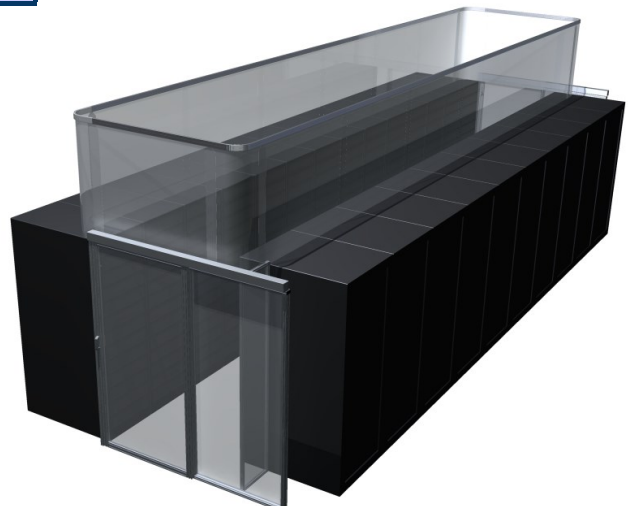


# Technical Data: Single Sliding Door with Auto Closer

## Standard Specifications

Size and Finish		Panel Options	Test	Result
Frame Height *	Up to 98"	3 mm Polycarbonate	ASTM E-84	Class B
Frame Width *	Up to 80"		ASTM D635	CC1
Header Width	80 1/8"		ASTM D2843	<75
Pass Through Width	34 3/4"	4.5 mm Polycarbonate	UL 94	V-0
Footprint	3 5/8"		ASTM D635	CC1
Header Height	3 11/16"		ASTM D2843	Passed
Total Door Height = Frame Height + Header Height		3 mm Clear PVC	FM 4910	Passed
<b>Door &amp; Frame</b>			UL 94	V-0
Material	6560 T-6 Temper Aluminum		ASTM E-84	Class A
Tensile Strength	30,000 psi			

\* Specify size when ordering

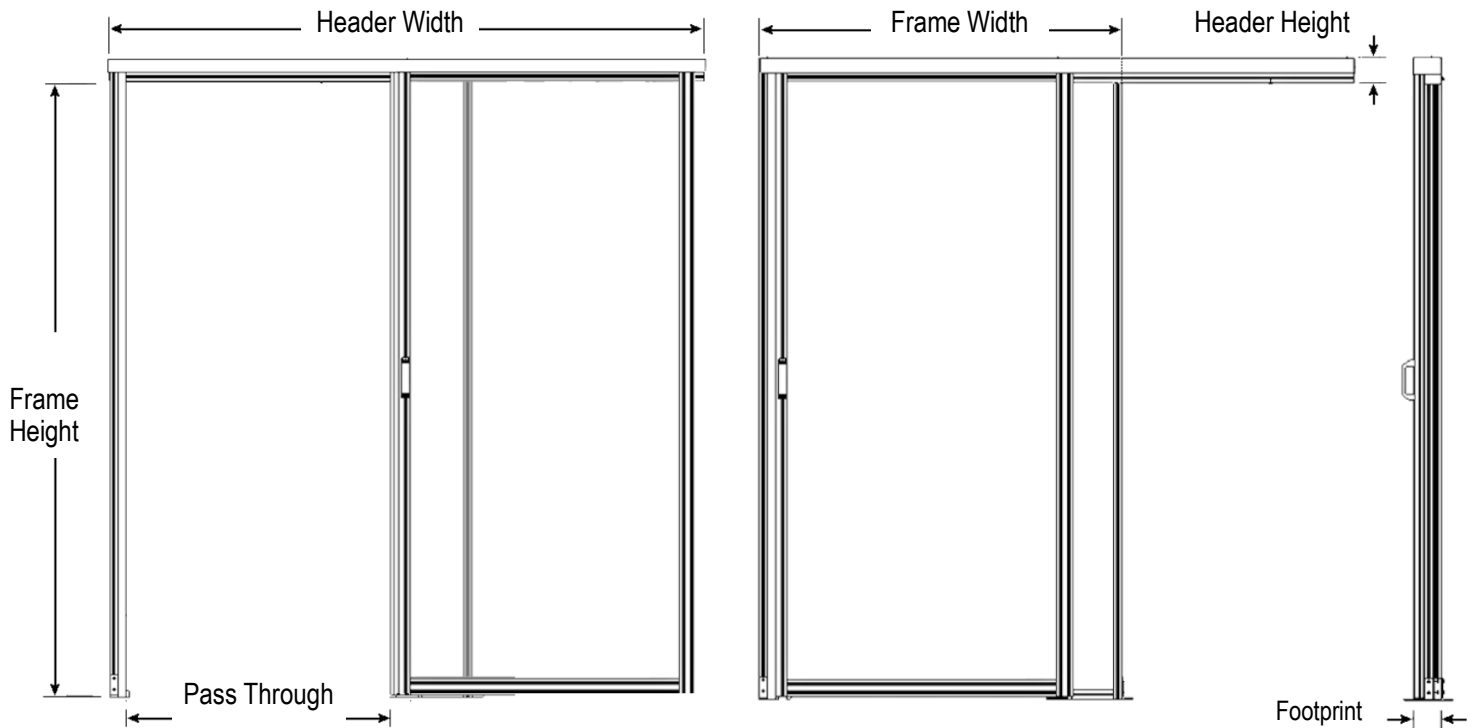

### Measurements Needed

1. Frame Height - Measurement from ground to bottom of Header. Match Frame Height to height of cabinets. Door header will be positioned above the cabinets, ensure that there is clearance.
2. Frame Width - Measurement from frame edge to frame edge. Make frame width at least 2.5" wider than aisle width to ensure aisle is fully contained.